


Tankless Install Made Ez With Keyline



9768 Firestone Blvd., Downey, CA 90241
Office 562-904-3910
Orders-KSI@keylinesales.com | keylinesales.com

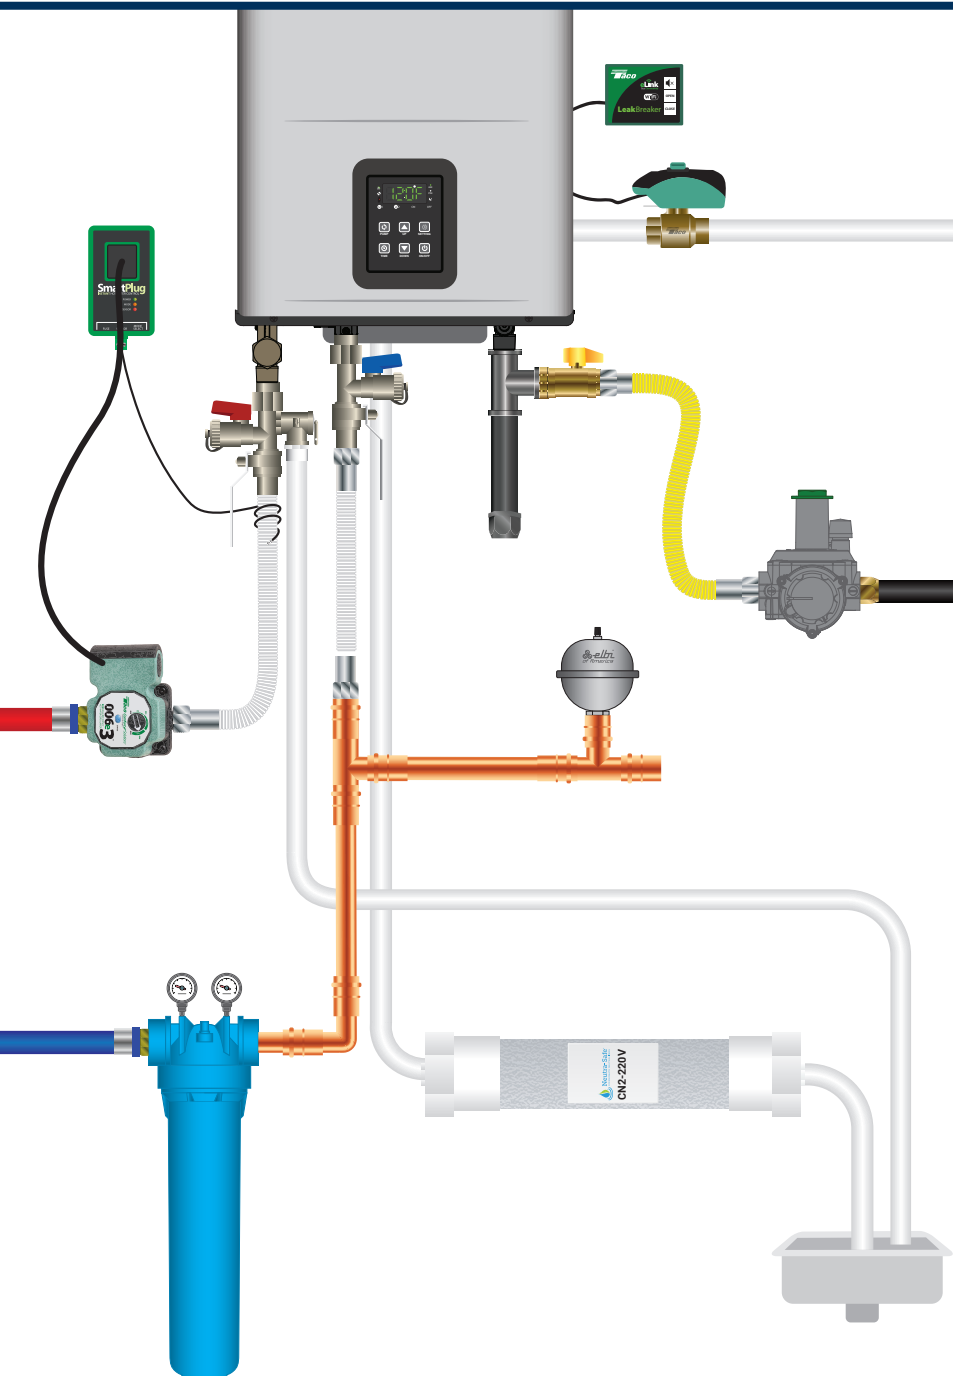

EzPro Tankless Water Heater Kit

- Stainless Steel (304 SS) Thermal Expansion Tank
- 24" Large Diameter Gas Connector w/ 3/4" Gas Valve
- 3/4" x 1/2" Reducer Bushing
- White/Blue Water Tape | Yellow Gas Tape
- Black Iron Sediment Trap | 3/4" Gas Tee 6" Nipple 3/4" Cap
- 3/4" x 3/4" x 1/2" Copper SWT Red Tee 1/2" SWT Copper Street Female Adapter
- (2) 3/4" FIP x 18" Water Connectors or (2) 3/4" SWT x FIP x 18" Water Connectors
- 3/4" SWT Isolation Valves Kit w/ 3/4" Pressure Relief Valve or
- 3/4" IPS Isolation Valves Kit w/ 3/4" Pressure Relief Valve

Add-on Products



ZC1381482

DP 20 RT Mono 3/4" NPT AB - Blue - 2.5"x20" - SS Inserts,
Scale Reduction Cartridge Bracket & Wrench Included

RA5777526

CPP-SP 20 RT 5 Micron - for
Sediment & Scale Reduction 2.5" x 20"



NS-CN2-220V

Condensate Neutralizer Kit, 220,000 BTU/hr Capacity,
PVC Connections, Horizontal or Vertical Install

22RCK-S (Recharge Kit)

2" Sack Recharge Kit / O-rings



0015e3

Flow 11 GPM | Head 13 Ft.

SP115-1 SmartPlug

Easy to Install: Upgrades any recirculation
pump to "Smart" operation.



LBW-075-H-1LF

LeakBreaker® Water Heater Shut-Off



31052

Suitable for use with Natural Gas, LPG, and other noncorrosive, clean gas

- Max. Inlet Pressure: CSA rated - 2 PSIG
- Outlet Pressure: 2" W.C. to 14" W.C.
- Temperature Range: -40°F to 150°F
- Connections: 1/2" - 4"



32141 Red | 32241 Blue

PureFlow PEX Tubing Coils - PEX designation code 5306
30 Year Warranty plus - UV resistance up to 6 months

90541

3/4" PEX Press x 3/4" Male Adapter w/ Attached Sleeve



FGP-CS-750-25 - 3/4" x 25ft.

Corrugated Stainless Steel Tubing, Flexible, Engineered Polymer Jacket

FGP-FST-500

AutoFlare Straight 1/2"